

V-Gate

motor-driven mobile sliding gate

Dimensions/ Weight

LxWxH: 2x1.2x2.45m

Weight: 1,6t

Fence connections

Construction fence module

Double-bar fence module

Platform/ Assembly

Levelling by adjustable feet

Transport: by forklift or crane

4 foldable elements for compact transport measurement

Safeguards

Rubber buffer on shear edges

Light barrier

Signal Light

Force shut-off

Access control

Opening/closing by remote control

RFID reader (single/double-sided)

Access terminal (with web software + screens)

Integration of customer access control

Power supply

230V supply via CEE plug

Motor

24V electronic motor/control unit with remote control

Soft-start, soft-close function

At least IP44

Speed of 12,6 m/min

Surface

galvanised


galvanised + powder coated RAL 9005 (matt black)

galvanised + powder-coated RAL colour of choice

Standards

EN ISO 12100/ EN60204-1/ EN ISO 13849-1/ EN ISO 13850/ EN ISO 13857/ EN ISO 13854/

EN 614/ EN 12453/ EN12604

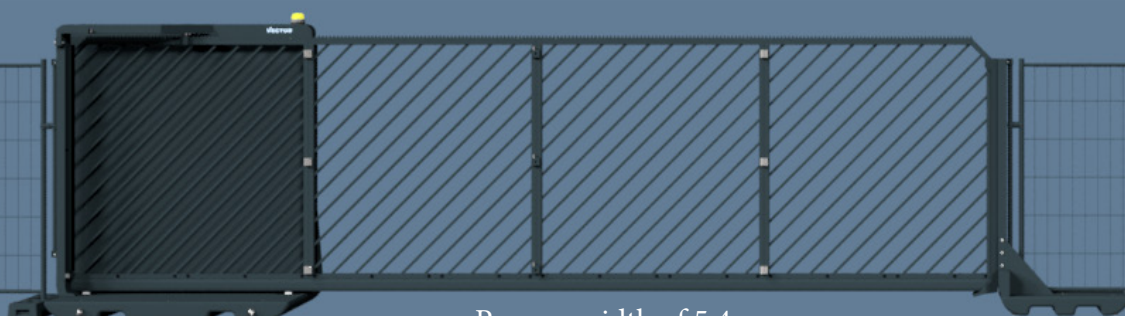

Passage width of 5.4 m